

CONDUIT BODIES

Watertight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:
To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- NEMA 4 Watertight

Standard Materials:

Malleable iron
Covers - Stamped steel
Gasket - Neoprene rubber

Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party Standards:


UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1
NEMA 4

The only Malleable Iron Conduit Bodies Watertight Rated Type NEMA 4.

Protected from dirt, rain, sleet, snow, windblown dust, splashing water, hose-directed water and ice build up.


Winner of the 2007 EC&M Product of the Year Competition in the Conduit & Cable Fitting Category!

PATENTED
U.S. Patent No. 8,129,631 B1



Threaded LB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MLB1CG	1/2"	4-11/16"	1-3/8"	2-7/16"	81.8
MLB2CG	3/4"	5-3/8"	1-5/8"	2-11/16"	111.7
MLB3CG	1"	6-3/16"	1-7/8"	3-1/16"	164.4
MLB4CG	1-1/4"	8-1/8"	2-5/8"	3-1/4"	323.6
MLB5CG	1-1/2"	8-1/8"	2-5/8"	3-5/16"	367.8
MLB6CG	2"	10-1/2"	3-1/4"	5-1/16"	590.4
MLB7CG	2-1/2"	13-5/8"	4-7/16"	6-1/4"	1205.7
MLB8CG	3"	13-7/8"	4-7/16"	6-3/4"	1261.0
MLB9CG	3-1/2"	16-1/4"	5-11/16"	7-3/4"	2139.5
MLB10CG	4"	16-5/8"	5-11/16"	8-1/16"	2250.0



Threaded C Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MC1CG	1/2"	5-3/8"	1-3/8"	1-3/4"	109.5
MC2CG	3/4"	6"	1-5/8"	2-1/8"	133.4
MC3CG	1"	7-1/16"	1-7/8"	2-5/16"	191.4
MC4CG	1-1/4"	9"	2-5/8"	3-1/4"	345.7
MC5CG	1-1/2"	9"	2-5/8"	3-5/16"	404.6
MC6CG	2"	11-1/2"	3-1/4"	3-15/16"	608.8
MC7CG	2-1/2"	15"	4-7/16"	4-3/4"	1316.2
MC8CG	3"	15-1/8"	4-7/16"	5-5/8"	1537.2
MC9CG	3-1/2"	18-1/8"	5-11/16"	6-1/2"	2360.5
MC10CG	4"	18-1/8"	5-11/16"	6-1/2"	2471.0

CONDUIT BODIES

Watertight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- NEMA 4 Watertight

Standard Materials:

Malleable iron
Covers - Stamped steel
Gasket - Neoprene rubber

Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party


Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1
NEMA 4

The only Malleable Iron Conduit Bodies Watertight Rated Type NEMA 4.

Protected from dirt, rain, sleet, snow, windblown dust, splashing water, hose-directed water and ice build up.


Winner of the 2007 EC&M Product of the Year Competition in the Conduit & Cable Fitting Category!

PATENTED
U.S. Patent No.
8,129,631 B1



Threaded LL Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MLL1CG	1/2"	4-11/16"	2-1/16"	1-3/4"	87.6
MLL2CG	3/4"	5-3/8"	2-1/4"	2-1/8"	109.7
MLL3CG	1"	6-3/16"	2-5/8"	2-5/16"	159.8
MLL4CG	1-1/4"	8-1/8"	2-3/4"	3-1/4"	345.7
MLL5CG	1-1/2"	8-1/8"	3-1/2"	3-5/16"	367.8
MLL6CG	2"	10-1/2"	4-1/8"	3-15/16"	553.6
MLL7CG	2-1/2"	13-5/8"	4-11/16"	4-3/4"	1205.7
MLL8CG	3"	13-7/8"	5-7/8"	5-5/8"	1537.2
MLL9CG	3-1/2"	16-1/4"	6-1/8"	6-1/2"	2471.0
MLL10CG	4"	16-1/4"	6-15/16"	6-1/2"	2581.5



Threaded LR Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MLR1CG	1/2"	4-11/16"	2-1/16"	1-3/4"	82.3
MLR2CG	3/4"	5-3/8"	2-1/4"	2-1/8"	115.0
MLR3CG	1"	6-3/16"	2-5/8"	2-5/16"	178.2
MLR4CG	1-1/4"	8-1/8"	2-3/4"	3-1/4"	367.8
MLR5CG	1-1/2"	8-1/8"	2-13/16"	3-5/16"	381.6
MLR6CG	2"	10-1/2"	4-7/16"	3-15/16"	682.5
MLR7CG	2-1/2"	13-5/8"	5-3/8"	4-3/4"	1205.7
MLR8CG	3"	13-7/8"	5-7/8"	5-5/8"	1537.2
MLR9CG	3-1/2"	16-1/4"	6-7/8"	6-1/2"	2471.0
MLR10CG	4"	16-5/8"	7-3/16"	6-1/2"	2650.5

CONDUIT BODIES

Watertight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- NEMA 4 Watertight

Standard Materials:

Malleable iron
Covers - Stamped steel
Gasket - Neoprene rubber

Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party Standards:

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1
NEMA 4

The only Malleable Iron Conduit Bodies Watertight Rated Type NEMA 4.


Protected from dirt, rain, sleet, snow, windblown dust, splashing water, hose-directed water and ice build up.

Winner of the 2007 EC&M Product of the Year Competition in the Conduit & Cable Fitting Category!

PATENTED


U.S. Patent No.

8,129,631



Threaded T Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MT1CG	1/2"	5-3/8"	2-1/16"	1-11/16"	121.8
MT2CG	3/4"	6"	2-1/4"	1-15/16"	152.0
MT3CG	1"	7-1/16"	2-5/8"	2-1/4"	218.1
MT4CG	1-1/4"	9"	2-3/4"	3-1/8"	367.8
MT5CG	1-1/2"	9"	3-1/2"	3-1/8"	404.6
MT6CG	2"	11-1/2"	4-1/8"	3-3/4"	719.3
MT7CG	2-1/2"	15"	5-11/16"	5-3/16"	1371.5
MT8CG	3"	15-1/8"	5-7/8"	5-3/16"	1647.7
MT9CG	3-1/2"	18-1/8"	6-13/16"	5-3/4"	2692.0
MT10CG	4"	18-1/8"	7-3/16"	5-3/4"	2692.0



Threaded TB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MTB1CG	1/2"	5-1/4"	1-3/8"	1-11/16"	99.7
MTB2CG	3/4"	6-1/16"	1-5/8"	2"	134.7
MTB3CG	1"	7-1/8"	1-7/8"	2-1/4"	219.0
MTB4CG	1-1/4"	9-5/16"	2-5/8"	4-1/4"	378.9
MTB5CG	1-1/2"	9-5/16"	2-5/8"	4-1/4"	456.2
MTB6CG	2"	11-13/16"	3-1/4"	4-3/4"	746.9

CONDUIT BODIES

Watertight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

Conduit Body

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- NEMA 4 Watertight

Watertight Cover

- Raised dome
- Captive screws

Standard Materials:

Malleable iron
Stamped steel cover
Gasket - Neoprene rubber
Stainless steel screws
Nylon washers

Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party

Standards:

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1
NEMA 4

**The only Malleable Iron
Conduit Bodies
Watertight Rated Type
NEMA 4.**

**Protected from dirt,
rain, sleet, snow,
windblown dust,
splashing water, hose-
directed water and ice
build up.**


**Winner of the 2007
EC&M Product of
the Year**

**Competition in the
Conduit & Cable Fit-
ting Category!**

PATENTED


U.S. Patent No.

8,129,631



Threaded X Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MX1CG	1/2"	5-7/16"	2-13/16"	2-1/8"	150.1
MX2CG	3/4"	6-1/16"	2-15/16"	2-7/16"	187.1
MX3CG	1"	7-1/8"	3-9/16"	2-11/16"	268.5
MX4CG	1-1/4"	9-1/8"	4-7/16"	3-1/16"	452.7
MX5CG	1-1/2"	9-1/8"	4-7/16"	3-1/4"	498.9
MX6CG	2"	11-3/4"	5-3/8"	4-1/16"	889.0



Raised Dome Stamped Steel Conduit Body Cover & Neoprene Gasket
For Rigid • IMC conduit

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
SCG1	1/2"	3-15/16"	1-3/8"	3/8"	11.3
SCG2	3/4"	4-11/16"	1-5/8"	7/16"	15.0
SCG3	1"	5-3/8"	1-7/8"	7/16"	21.7
SCG4	1-1/4" - 1-1/2"	7-1/4"	2-5/8"	1/2"	36.3
SCG5	2"	9-9/16"	3-1/4"	5/8"	56.3
SCG6	2-1/2" - 3"	12-5/16"	4-7/16"	7/8"	100.7
SCG7	3-1/2" - 4"	14-7/8"	5-11/16"	7/8"	150.5

CONDUIT BODIES

Rigid Conduit Bodies, Malleable Iron • for Rigid • IMC conduit

Application:
To provide access to conductors for pulling, splicing and maintenance.


Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:
Malleable iron


Standard Finish:
Zinc plated with
Aluminum enamel paint

Applicable Third Party Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



Threaded LB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MLB1	1/2"	4-11/16"	1-5/16"	2-1/16"	70	70.6
MLB2	3/4"	5-3/8"	1-1/2"	2-1/4"	36	96.7
MLB3	1"	6-3/16"	1-13/16"	2-5/8"	32	142.7
MLB4	1-1/4"	8-1/8"	2-5/8"	2-3/4"	12	287.3
MLB5	1-1/2"	8-1/8"	2-5/8"	2-13/16"	12	331.5
MLB6	2"	10-1/2"	3-1/8"	4-7/16"	12	534.1
MLB7	2-1/2"	13-5/8"	4-5/16"	5-3/8"	4	1105.0
MLB8	3"	13-7/8"	4-5/16"	5-7/8"	4	1160.3
MLB9	3-1/2"	16-1/4"	5-5/8"	6-7/8"	2	1989.0
MLB10	4"	16-5/8"	5-5/8"	7-3/16"	2	2099.5



Threaded C Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MC1	1/2"	5-3/8"	1-5/16"	1-3/8"	48	98.2
MC2	3/4"	6"	1-1/2"	1-11/16"	48	118.4
MC3	1"	7-1/16"	1-13/16"	1-7/8"	42	169.7
MC4	1-1/4"	9"	2-5/8"	2-3/4"	10	309.4
MC5	1-1/2"	9"	2-5/8"	2-13/16"	15	368.3
MC6	2"	11-1/2"	3-1/8"	3-5/16"	12	552.5
MC7	2-1/2"	15"	4-5/16"	3-7/8"	6	1215.5
MC8	3"	15-1/8"	4-5/16"	4-3/4"	4	1436.5
MC9	3-1/2"	18-1/8"	4-7/8"	5-5/8"	2	2210.0
MC10	4"	18-1/8"	4-7/8"	5-5/8"	2	2320.5



CONDUIT BODIES

Rigid Conduit Bodies, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:

Malleable iron

Standard Finish:

Zinc plated with
Aluminum enamel paint


Applicable Third Party

Standards:

UL Standard: 514A


Fed. Spec. W-C-586D

NEMA: FB-1



Threaded LL Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MLL1	1/2"	4-11/16"	2-1/16"	1-3/8"	70	76.3
MLL2	3/4"	5-3/8"	2-1/4"	1-11/16"	50	94.7
MLL3	1"	6-3/16"	2-5/8"	1-7/8"	30	138.1
MLL4	1-1/4"	8-1/8"	2-3/4"	2-3/4"	15	309.4
MLL5	1-1/2"	8-1/8"	3-1/2"	2-13/16"	12	331.5
MLL6	2"	10-1/2"	4-1/8"	3-5/16"	12	497.3
MLL7	2-1/2"	13-5/8"	4-11/16"	3-7/8"	6	1105.0
MLL8	3"	13-7/8"	5-7/8"	4-3/4"	4	1436.5
MLL9	3-1/2"	16-1/4"	6-1/8"	5-5/8"	2	2320.5
MLL10	4"	16-1/4"	6-15/16"	5-5/8"	2	2431.0



Threaded LR Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MLR1	1/2"	4-11/16"	2-1/16"	1-3/8"	70	71.0
MLR2	3/4"	5-3/8"	2-1/4"	1-11/16"	50	100.0
MLR3	1"	6-3/16"	2-5/8"	1-7/8"	30	156.5
MLR4	1-1/4"	8-1/8"	2-3/4"	2-3/4"	15	331.5
MLR5	1-1/2"	8-1/8"	2-13/16"	2-13/16"	12	345.3
MLR6	2"	10-1/2"	4-7/16"	3-5/16"	12	626.2
MLR7	2-1/2"	13-5/8"	5-3/8"	3-7/8"	6	1105.0
MLR8	3"	13-7/8"	5-7/8"	4-3/4"	4	1436.5
MLR9	3-1/2"	16-1/4"	6-7/8"	5-5/8"	2	2320.5
MLR10	4"	16-5/8"	7-3/16"	5-5/8"	2	2500.0



CONDUIT BODIES

Rigid Conduit Bodies, Malleable Iron • for Rigid • IMC conduit

Application:
To provide access to
conductors for pulling, splicing
and maintenance.


Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:
Malleable iron


Standard Finish:
Zinc plated with
Aluminum enamel paint

**Applicable Third Party
Standards:**
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



Threaded T Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MT1	1/2"	5-3/8"	2-1/16"	1-5/16"	60	110.5
MT2	3/4"	6"	2-1/4"	1-1/2"	40	137.0
MT3	1"	7-1/16"	2-5/8"	1-13/16"	25	196.4
MT4	1-1/4"	9"	2-3/4"	2-5/8"	15	331.5
MT5	1-1/2"	9"	3-1/2"	2-5/8"	12	368.3
MT6	2"	11-1/2"	4-1/8"	3-1/8"	8	663.0
MT7	2-1/2"	15"	5-11/16"	4-5/16"	4	1270.8
MT8	3"	15-1/8"	5-7/8"	4-5/16"	4	1547.0
MT9	3-1/2"	18-1/8"	6-13/16"	4-7/8"	2	2541.5
MT10	4"	18-1/8"	7-3/16"	4-7/8"	2	2541.5



Threaded TB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MTB1	1/2"	5-1/4"	1-5/16"	1-5/16"	42	88.4
MTB2	3/4"	6-1/16"	1-9/16"	1-9/16"	60	119.7
MTB3	1"	7-1/8"	1-13/16"	1-13/16"	28	197.3
MTB4	1-1/4"	9-5/16"	2-7/16"	3-3/4"	15	342.6
MTB5	1-1/2"	9-5/16"	2-9/16"	3-3/4"	15	419.9
MTB6	2"	11-13/16"	3-3/16"	4-1/8"	8	690.6



CONDUIT BODIES

Rigid Conduit Bodies, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:

Malleable iron


Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party

Standards:

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1

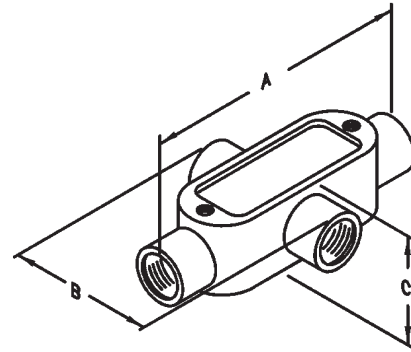

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MX1	1/2"	5-7/16"	2-13/16"	1-3/4"	42	138.8
MX2	3/4"	6-1/16"	2-15/16"	2"	30	172.1
MX3	1"	7-1/8"	3-9/16"	2-1/4"	21	246.8
MX4	1-1/4"	9-1/8"	4-7/16"	2-9/16"	12	416.4
MX5	1-1/2"	9-1/8"	4-7/16"	2-3/4"	12	462.6
MX6	2"	11-3/4"	5-3/8"	3-7/16"	6	832.7

