

Steel Set Screw Couplings for Steel Conduit

Features:

- Pre-set & staked tri-head screws 1/2" thru 2". Hex head screws 2-1/2" thru 4"
- Heavy steel walls
- Concrete tight when taped
- UL listed for Steel EMT Conduit
- RoHS compliant



Standard Materials:
Steel

Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

* Furnished with four set screws

^ Indicates UL and CUL Listed for EMT, IMC and Rigid conduit.

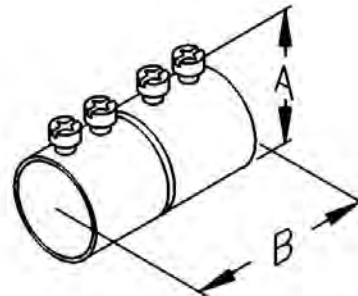

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SK50R	1/2"	7/8"	1-5/8"	480	7.8
SK75R	3/4"	1-1/8"	1-7/8"	298	12.7
SK100R	1"	1-3/16"	2-5/16"	168	19.6
SK125R	*1-1/4"	1-3/4"	2-3/4"	96	40.2
SK150R	*1-1/2"	2"	3"	60	57.5
SK200R	*2"	2-7/16"	3-1/4"	40	64.6
^SK250R	*2-1/2"	3-1/8"	4"	12	130.0
^SK300R	*3"	3-3/4"	4-1/4"	10	140.0
^SK350R	*3-1/2"	4-1/4"	4-1/2"	8	216.6
^SK400R	*4"	4-3/4"	4-3/4"	5	250.0

