

RIGID - IMC

FS & FD Cast Device Boxes

Features:

- Tapered threads (NPT with integral bushings)
- Internal grounding screw
- Suitable for use in wet locations when used with FSFDCM1 cover and FSFDCG gasket
- Malleable iron is suitable for concrete use

Standard Materials:
Malleable iron

Standard Finish:
Zinc plated


Applicable Third Party Standards:
UL Standard: 514A
NEMA: FB-1



FS Type




FD Type

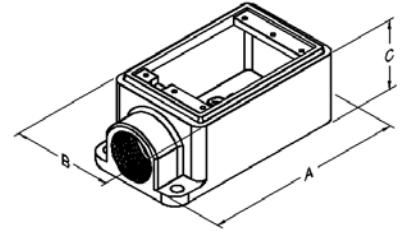

FSC Type



FDC Type

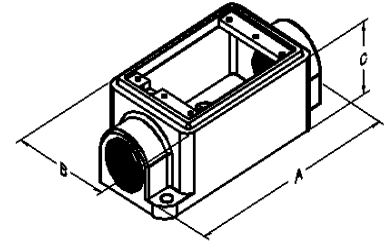

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
FS50	1/2"	5-1/4"	2-15/16"	2-1/8"	24	221.9
FS75	3/4"	5-1/4"	2-15/16"	2-1/8"	24	233.5
FS100	1"	5-1/4"	2-15/16"	2-1/8"	24	242.8
FD50	1/2"	5-1/4"	3"	2-7/8"	16	278.1
FD75	3/4"	5-1/4"	3"	2-7/8"	16	272.8
FD100	1"	5-1/4"	3"	2-7/8"	16	283.7
FSC50	1/2"	6-1/16"	2-15/16"	2-1/8"	24	234.4
FSC75	3/4"	6-1/16"	2-15/16"	2-1/8"	24	240.6
FSC100	1"	6-1/16"	2-15/16"	2-1/8"	24	250.2
FDC50	1/2"	6-1/16"	3"	2-7/8"	16	313.1
FDC75	3/4"	6-1/16"	3"	2-7/8"	16	93.8
FDC100	1"	6-1/16"	3"	2-7/8"	16	305.6



RIGID - IMC

FS & FD Cast Device Box Covers & Gasket

Features:

- Each cover comes with captive screws
- FSFDCS1 & FSFDCA1 - Raintight if used with FSFDCG1

Standard Materials:

FSFDCSx - Steel
FSFDCAx - Aluminum
Gasket - Neoprene rubber

Standard Finish:

Zinc plated

Applicable Third Party

Standards:
CSA Standard: C22.2
No. 42.1
UL 514D



FSFDCS1

Blank cover for splices and taps
No device
Raintight if used with FSFDCG1
Sheet steel



FSFDCS2

Unguarded square handle switch
Sheet steel



FSFDCS3

Duplex receptacles
Sheet steel



FSFDCS4

GFI receptacles
Sheet steel

Steel

CATALOG NUMBER	PCS/ BOX	WEIGHT PER C
FSFDCS1	25	18.1
FSFDCS2	25	15.6
FSFDCS3	25	12.5
FSFDCS4	25	11.9

Aluminum

CATALOG NUMBER	PCS/ BOX	WEIGHT PER C
FSFDCA1	25	9.4



FSFDCA1

Blank cover for splices and taps
No device
Raintight if used with FSFDCG1
Sheet aluminum

Gasket

CATALOG NUMBER	PCS/ BOX	WEIGHT PER C
FSFDCG1	25	3.5



FSFDCG1

Gasket - Raintight if used with FSFDCS1, FSFDCA1 & FSFDCM1
Neoprene rubber



RIGID - IMC

FS & FD Cast Device Box Covers & Gasket

Features:

- Each cover individually bagged and supplied with screws
- FSFDCM1 - Raintight if used with FSFDCG

Standard Materials:

FSFDCMx - Malleable iron
Gasket - Neoprene rubber

Standard Finish:

Zinc plated

Applicable Thrid Party

Standards:

UL Standard: 514D



FSFDCM1

Blank cover for
splices and taps
No device
Raintight if used
with FSFDCG
Malleable iron



FSFDCM2

Guarded square
handle switch
Malleable iron



FSFDCM3

Duplex receptacle
Malleable iron

Malleable Iron Covers

CATALOG NUMBER	PCS/ BOX	WEIGHT PER C
FSFDCM1	25	56.3
FSFDCM2	25	62.5
FSFDCM3	25	54.5

Gasket

CATALOG NUMBER	PCS/ BOX	WEIGHT PER C
FSFDCG	25	3.5

^ UL Listing not applicable to this part



FSFDCG

Gasket - Raintight if used
with FSFDCM1
Neoprene rubber

