


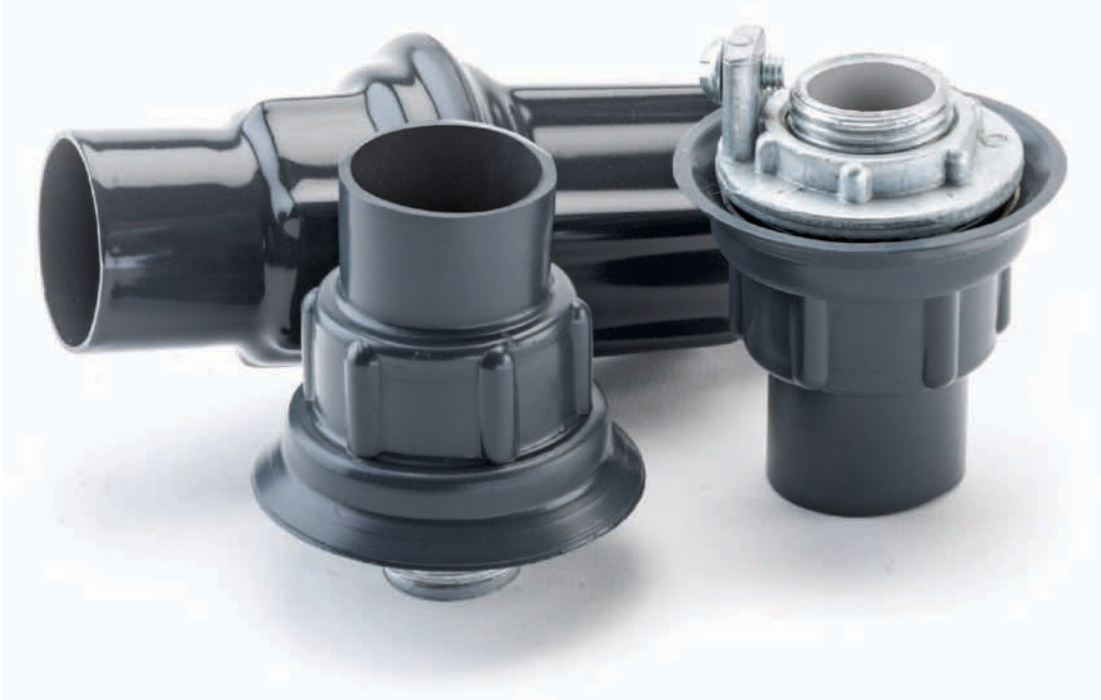

Knockout Hubs

Description:

PROCOAT ST style knockout hubs are used to terminate conduit runs through the wall of a sheet metal electrical enclosure. They are available with or without grounding lug.

Features:

- 40 mil gray PVC exterior coating
- ST available in 12 trade sizes from 1/2" through 6"
- Sealing sleeves on conduit side of hub
- Molded PVC gasket seals flush with enclosure wall
- O-ring gasket provides additional seal

Standards: Steel only:

ST, STG

- UL 514B (E509375)

■ NEC/CEC:

Class I, Division 2

Class II, Division 1 & 2

Class III, Division 1 & 2

NOTE:


- All Screw-tight Hubs are listed for NEMA and UL type enclosures 2, 3, 3R, 4, 4x, 11 and 12
- Grounding and Bonding Hubs are listed for NEMA Enclosures 2, 3, 3R, 4 and 12

Knockout Hubs Technical Data

ST


PIPE SIZE	CATALOG #	NOMINAL WEIGHT	A	B	C	MAX WALL THICK	ALUMINUM CATALOG #
1/2"	ST15P	0.2	1.34	2.00	0.81	0.19	ST15AP
3/4"	ST20P	0.3	1.47	2.25	0.91	0.19	ST20AP
1"	ST25P	0.4	1.66	2.50	1.03	0.25	ST25AP
1-1/4"	ST32P	0.4	1.69	3.25	1.03	0.25	ST32AP
1-1/2"	ST40P	0.6	1.69	3.50	1.03	0.25	ST40AP
2"	ST50P	1.2	1.75	4.25	1.09	0.25	ST50AP
2-1/2"	ST65P	1.5	2.22	4.75	1.28	0.25	ST65AP
3"	ST80P	2.1	2.31	5.25	1.38	0.25	ST80AP
3-1/2"	ST90P	3.0	2.38	5.50	1.44	0.25	ST90AP
4"	ST100P	3.5	2.44	6.25	1.50	0.25	ST100AP
5"	ST125P	5.4	2.94	7.50	2.00	0.25	ST125AP
6"	ST150P	6.9	3.00	8.50	2.00	0.31	ST150AP

KNOCKOUT HUB CONFIGURATIONS

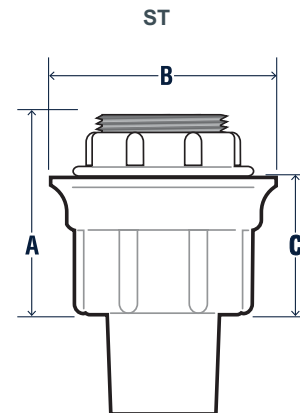

STG

PIPE SIZE	CATALOG #	NOMINAL WEIGHT	A	B	C	MAX WALL THICK	ALUMINUM CATALOG #
1/2"	STG15P	0.2	1.34	2.00	0.81	0.19	STG15AP
3/4"	STG20P	0.3	1.47	2.25	0.91	0.19	STG20AP
1"	STG25P	0.4	1.66	2.50	1.03	0.25	STG25AP
1-1/4"	STG32P	0.4	1.69	3.25	1.03	0.25	STG32AP
1-1/2"	STG40P	0.6	1.69	3.50	1.03	0.25	STG40AP
2"	STG50P	1.2	1.75	4.25	1.09	0.25	STG50AP
2-1/2"	STG65P	1.5	2.22	4.75	1.28	0.25	STG65AP
3"	STG80P	2.1	2.31	5.25	1.38	0.25	STG80AP
3-1/2"	STG90P	3.0	2.38	5.50	1.44	0.25	STG90AP
4"	STG100P	3.5	2.44	6.25	1.50	0.25	STG100AP
5"	STG125P	5.4	2.94	7.50	2.00	0.25	STG125AP
6"	STG150P	6.9	3.00	8.50	2.00	0.31	STG150AP

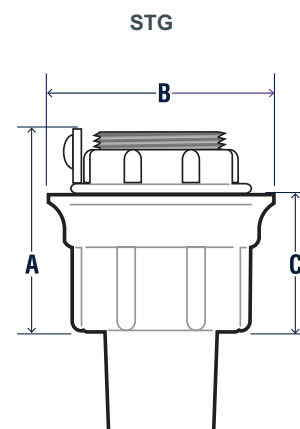

* Unlimited wall thickness – determined by nipple used.