

Arktite WSR interlocked receptacles with enclosed disconnect switches

NEMA 3R, 4, 12
Raintight
Watertight
Corrosion-resistant

3P


Ordering information:

System	Amperage	Hub size ^A	Cat. # 240 VAC, 600 VAC, 250 VDC	Max. HP rating 240 VAC	Max. HP rating 480 VAC	Max. HP rating 600 VAC
3-wire, 3-pole Style 1, fusible	30	1"	WSR3351 ^B	7½	15	20
	60	1¼"	WSR6351 ^B	15	30	50
	100	1½"	WSR10351 ^B	30	60	75
3-wire, 4-pole Style 2, fusible	30	1"	WSR3352 ^B	7½	15	20
	60	1¼"	WSR6352 ^B	15	30	50
	100	1½"	WSR10352 ^B	30	60	75
3-wire, 3-pole Style 1, non-fusible	30	1"	WSR33541	7½	15	20
	60	1¼"	WSR63541	15	30	50
	100	1½"	WSR103541	30	60	75
3-wire, 4-pole Style 2, non-fusible	30	1"	WSR33542	7½	15	20
	60	1¼"	WSR63542	15	30	50
	100	1½"	WSR103542	30	60	75

APJ/NPJ plugs:


Amperage	Max. voltage	Outside dia. of cable, flexible conduit or armored cable	Cat. # Style 1 ^C 3-wire, 3-pole	Cat. # Style 2 ^C 3-wire, 4-pole
30	250 VDC; 600 VAC	0.60 - 1.20"	APJ3375	APJ3485
		0.55 - 0.70"		NPJ3483
		0.70 - 0.85"		NPJ3484
60	250 VDC; 600 VAC	0.75 - 1.45"	APJ6375	APJ6485
		0.75 - 1.07"		NPJ6484
		1.07 - 1.35"		NPJ6485
100	250 VDC; 600 VAC	1.00 - 1.70"	APJ10377	APJ10487
		0.93 - 1.21"		NPJ10486
		1.21 - 1.50"		NPJ10487

Dimensions (in inches):

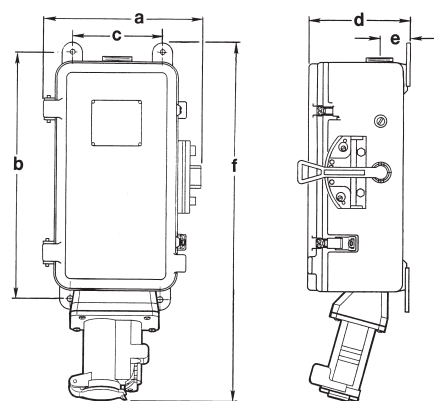

Dimension	30A	60A	100A
a	11¾	11¾	14⅞
b	20⅞	20⅞	26⅞
c	6⅞	6⅞	9⅞
d	7¼	7¼	8¼
e	2⅝	2⅝	2⅞
f	27⅞	28⅞	35⅞
g	4¼	5¼	7¼
gg	7	6⅞	7¼
Mtg. holes	⅜	⅜	⅞

Dimensions 'g' and 'gg' are exposed portion of plug when engaged with receptacle.



^AFurnished with reducer which may be removed to obtain one size larger opening. Locknut and bushing used must meet NEC requirements.

^BArranged for NEC Class H fuses. May be field converted to NEC Class J fuses.

^CStyle 1 – grounded through shell. Style 2 – grounded through extra pole and shell. For a detailed description of these grounding methods, see Section 1P.