




DIMENSIONS

- Housing Material: Copper-Free Aluminum
- Finish: Powder Epoxy Painted
- External Hardware: 316 Stainless Steel
- Weight: 25lbs (11.3kgs)

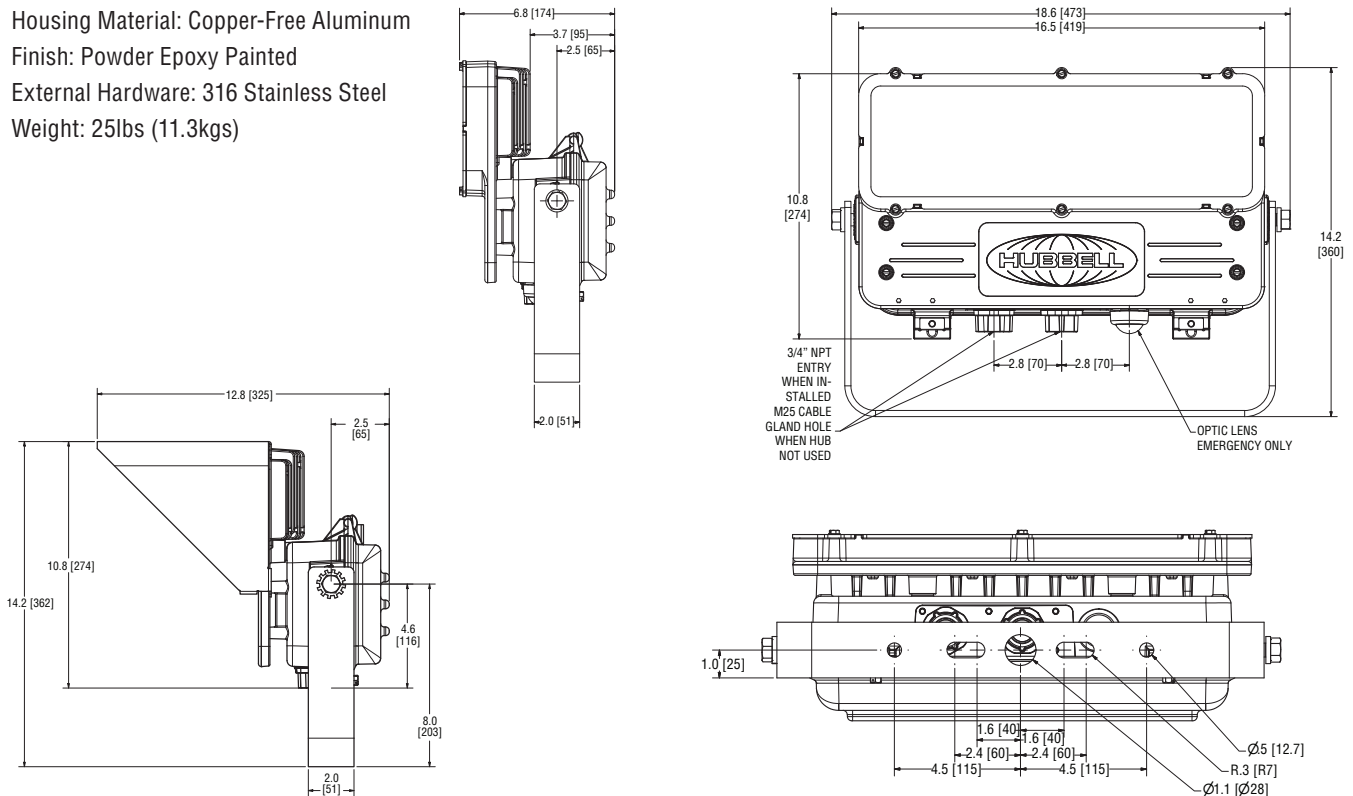

ORDERING INFORMATION AND AMBIENT SUITABILITY						C1D2			C1D2 SIMULTANEOUS			C2D1			IEC ZONE 2			IEC ZONE 21		
CATALOG NO.	WEIGHT LBS./ KG	WATTS	VOLTAGE	AMPS	DELIVERED LUMENS	40°C	55°C	65°C	40°C	55°C	65°C	40°C	55°C	65°C	40°C	55°C	65°C	40°C	55°C	65°C
KFL730	25 lbs / 11.3 kg	60	120-277	0.50-0.21	7948	T5	T4A	T4	T3C	T3C	T4	T3C	T3C	T3C	T5	T4	T3	160°C	160°C	160°C
KFL1030		90	120-277	0.8-0.3	10210	T5	T4A	T4	T3C	T3C	T4	T3C	T3C	T3C	T5	T4	T3	160°C	160°C	160°C
KFL1430- TURTLE		104	120-277	0.9-0.4	4401	T4A	T4A	—	T4A	T4A	—	T4A	T4A	—	T4	T4	—	160°C	160°C	—
KFL1430- GREEN		137		1.1-0.5	9702	T4A	T4A	—	T4A	T4A	—	T4A	T4A	—	T4	T4	—	160°C	160°C	—
KFL1430		120	120-277	1.0-0.4	15140	T5	T4A	T4	T3C	T3C	T4	T3C	T3C	T3C	T5	T4	T3	160°C	160°C	160°C
KFL2030		180	120-277	1.5-0.7	21370	T4	T3C	—	T3C	T3C	—	T3C	T3C	—	T4	T3	—	160°C	160°C	—
KFL3030		280	120-277	2.3-1.0	28940	T4	T3C	—	T3B	—	—	T3B	—	—	T4	T3	—	165°C	—	—

ORDERING INFORMATION AND AMBIENT SUITABILITY					DELIVERED LUMENS		C1D2		C1D2 SIMULTANEOUS		C2D1		IEC ZONE 2		IEC ZONE 21	
CATALOG NO.	WEIGHT LBS./KG	WATTS	VOLTAGE	AMPS	NORMAL OPERATION	DURING BATTERY BACKUP	40°C	50°C	40°C	50°C	40°C	50°C	40°C	50°C	40°C	50°C
KFL7IE130	25 lbs / 11.3 kg	60	120-277	0.50-0.21	7948	1000	T5	T4A	T3C	T3C	T3C	T3C	T5	T4	160°C	160°C
KFL7IE0530		60	120-278	0.50-0.22	7948	500	T6	T4A	T3C	T3C	T3C	T3C	T5	T4	160°C	160°C
KFL14IE130		120	120-277	0.8-0.3	15140	1000	T5	T4A	T3C	T3C	T3C	T3C	T5	T4	160°C	160°C
KFL14IE0530		120	120-278	0.8-0.4	15140	500	T6	T4A	T3C	T3C	T3C	T3C	T5	T4	160°C	160°C