

Beam Clamps and U-Bolts

PROCOAT PVC coated beam clamps are used to securely support conduit runs by attaching them to beams, angles, trusses and other structural members. They are available in the following styles:

Parallel– to attach the conduit run parallel to a beam or structural member.

Edge– to attach the conduit run at a 90° angle to a thin beam or structural member.

Right Angle– to attach the conduit run at a 90° angle to a beam or structural member.

U-Bolt– To attach the conduit run to a structural member or support.

Hanger Rod Beam Clamp– to attach a single all thread rod to a beam or structural member.

Features:

- 20 mil minimum gray PVC exterior coating on all types of beam clamps
- Right angle clamps supplied with plastic encapsulated screws
- All clamps specifically sized to fit PVC coated conduit
- Right angle and parallel clamps available in 10 trade sizes 1/2" through 4"
- Edge clamps available in 3 trade sizes 1/2" through 1"
- Hanger rod beam clamps available with 5 different jaw openings 15/16" through 2-1/8"

** UL: E516500



Parallel Beam Clamp



Edge Beam Clamp



Right Angle Beam Clamp **



U-Bolt

PARALLEL CONDUIT CLAMP

PIPE SIZE	CATALOG #	NOMINAL WEIGHT
1/2"	PAR15P	46.8
3/4"	PAR20P	63.0
1"	PAR25P	67.0
1-1/4"	PAR32P	100.0
1-1/2"	PAR40P	130.0
2"	PAR50P	158.0
2-1/2"	PAR65P	175.0
3"	PAR80P	200.0
4"	PAR100P	275.0

EDGE STYLE CONDUIT CLAMP


PIPE SIZE	CATALOG #	NOMINAL WEIGHT
1/2"	EDC15P	74.0
3/4"	EDC20P	90.0
1"	EDC25P	100.0
1-1/4"	EDC32P	125.0
1-1/2"	EDC40P	150.0
2"	EDC50P	198.0
2-1/2"	EDC65P	200.0
3"	EDC80P	250.0
4"	EDC100P	275.0

RIGHT ANGLE CONDUIT CLAMP

PIPE SIZE	CATALOG #	NOMINAL WEIGHT
1/2"	RAN15	49.0
3/4"	RAN20	53.0
1"	RAN25	61.0
1-1/4"	RAN32	65.0
1-1/2"	RAN40	92.0
2"	RAN50	100.0
2-1/2"	RAN65	125.0
3"	RAN80	150.0
4"	RAN100	198.0

CONDUIT U-BOLT

PIPE SIZE	CATALOG #	NOMINAL WEIGHT
1/2"	CLU15P	17.0
3/4"	CLU20P	18.0
1"	CLU25P	20.0
1-1/4"	CLU32P	20.0
1-1/2"	CLU40P	31.0
2"	CLU50P	34.0
2-1/2"	CLU65P	39.0
3"	CLU80P	44.0
4"	CLU100P	49.0

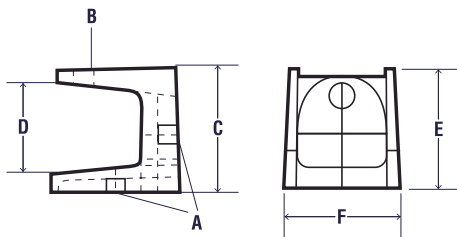

BEAM CLAMPS

PIPE SIZE	CATALOG #	A	B	C	D	E	F	NOMINAL WEIGHT	MAXIMUM LOAD
1"	KK500	1/4-20	5/16-1-1/8	1-3/8	7/8	1-1/4	1-1/8	25.0	500
1-1/4"	KK501	5/16-18	3/8-16	1-3/4	7/8	1-5/8	1-1/2	50.0	800
1-1/2"	KK502	3/8-16	1/2-13	2-1/16	7/8	2	2	90.0	2000
2"	KK503	1/2-13	1/2-13	2-5/8	1	1-1/4	1-1/8	195.0	2000
2-1/2"	KK508	1/2-13	1/2-13	2-1/4	7/8	2-1/2	2-5/8	25.0	4000