


Water-tight Hub

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to bond Rigid or IMC conduit to a box or enclosure

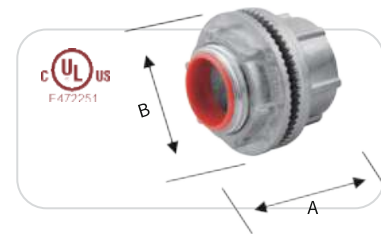


EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
C-1	1/2"	25	250	1.328	1.325
C-2	3/4"	1	200	1.448	1.512
C-3	1"	1	160	1.450	1.788
C-4	1-1/4"	1	90	1.575	2.295
C-5	1-1/2"	1	60	1.700	2.445
C-6	2"	1	60	1.700	2.875
C-7	2-1/2"	1	24	2.050	3.325
C-8	3"	1	24	2.150	4.050
C-10	4"	1	18	2.450	5.050

Threaded Conduit Coupling

Standard: UL 1242, ANSI C80.6

Material: Steel

Application: for use to join rigid conduit or IMC together

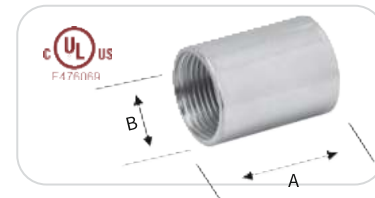


EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
IC01	1/2"	100	400	1.535	0.787
IC02	3/4"	50	200	1.575	0.984
IC03	1"	1	200	1.890	1.260
IC04	1-1/4"	1	150	2.047	1.594
IC05	1-1/2"	1	120	2.205	1.831
IC06	2"	1	50	2.362	2.323
IC07	2-1/2"	1	30	3.150	2.776
IC08	3"	1	30	3.346	3.465
IC10	4"	1	16	3.346	4.450

Conduit Connector Set Screw Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for use to bond unthreaded IMC or rigid conduit to a box or enclosure

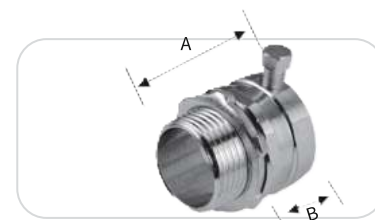

EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RSC01	1/2"	50	500	1.180	0.800
RSC02	3/4"	25	250	1.200	0.810
RSC03	1"	25	250	1.500	1.000
RSC04	1-1/4"	1	100	1.700	1.200
RSC05	1-1/2"	1	100	1.940	1.380
RSC06	2"	1	50	2.000	1.380
637S	2-1/2"	1	12	3.425	2.917
638S	3"	1	12	3.740	3.550
640S	4"	1	6	4.134	4.550


⌚ for EMT, IMC and Rigid

Conduit Coupling Set Screw Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for use to couple two ends of unthreaded IMC or rigid conduits

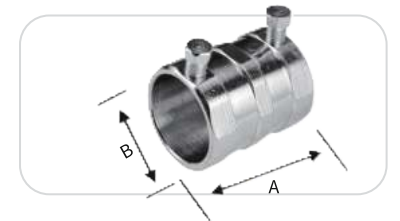

EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RSK01	1/2"	50	500	1.500	1.180
RSK02	3/4"	25	250	1.500	1.400
RSK03	1"	20	200	1.880	1.690
RSK04	1-1/4"	1	100	2.210	2.130
RSK05	1-1/2"	1	100	2.600	2.370
RSK06	2"	1	50	2.700	2.870
647S	2-1/2"	1	12	3.937	2.917
648S	3"	1	12	4.331	3.550
650S	4"	1	6	4.724	4.550

⌚ for EMT, IMC and Rigid

Conduit Connector Compression Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for use to bond unthreaded IMC or rigid conduit to a box or enclosure



EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RCC01	1/2"	50	500	1.352	1.171
RCC02	3/4"	25	250	1.478	1.428
RCC03	1"	20	200	1.580	1.750
RCC04	1-1/4"	1	100	1.860	2.150
RCC05	1-1/2"	1	100	1.941	2.382
RCC06	2"	1	50	2.488	3.382
657S	2-1/2"	1	12	3.878	2.818
658S	3"	1	8	4.375	3.550
660S	4"	1	6	4.745	4.550

⌚ for EMT, IMC and Rigid

Conduit Coupling Compression Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for use to couple two ends of unthreaded IMC or rigid conduits



EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RCK01	1/2"	50	500	1.742	1.171
RCK02	3/4"	25	250	1.821	1.428
RCK03	1"	20	200	1.949	1.750
RCK04	1-1/4"	1	100	2.652	2.150
RCK05	1-1/2"	1	100	2.700	2.382
RCK06	2"	1	50	2.927	3.382
667S	2-1/2"	1	12	4.876	2.818
668S	3"	1	8	5.200	3.550
670S	4"	1	6	5.725	4.550

⌚ for EMT, IMC and Rigid